

Data sheet

Pressure transmitters for industrial applications

MBS 32 and MBS 33



The standard pressure transmitters MBS 32 and MBS 33 are designed for use in almost all industrial applications, and offer reliable pressure measurements, even under harsh environmental conditions.

The flexible pressure transmitter programme covers different output signals, absolute or gauge (relative) versions, measuring ranges from 0 – 1 to 0 – 600 bar and a wide range of pressure and electrical connections.

Excellent vibration stability, robust construction, and a high degree of EMC / EMI protection equip the pressure transmitter to meet the most stringent industrial requirements.

Features

- Designed for use in severe industrial environments
- CE-marked: EMC protected in accordance with EU EMC Directive
- Enclosure and wetted parts of acid-resistant stainless steel (AISI 316L)
- Temperature compensated, linearized and laser adjusted
- Output signals:
 - MBS 32: 0 – 5 V, 1 – 5 V, 1 – 6 V or 0 – 10 V DC
 - MBS 33: 4 – 20 mA
- A wide range of pressure connections
- Electrical connection: plug or cable
- For use in Zone 2 explosive atmospheres

Technical data
Performance (EN 60770)

Accuracy (incl. non-linearity, hysteresis and repeatability)	$\leq \pm 0.3\% \text{ FS (typ.)}$
	$\leq \pm 0.8\% \text{ FS (max.)}$
Non-linearity BFSL (conformity)	$\leq \pm 0.2\% \text{ FS}$
Hysteresis and repeatability	$\leq \pm 0.1\% \text{ FS}$
Thermal zero point shift	$\leq \pm 0.1\% \text{ FS / 10K (typ.)}$
	$\leq \pm 0.2\% \text{ FS / 10K (max.)}$
Thermal sensitivity (span) shift	$\leq \pm 0.1\% \text{ FS / 10K (typ.)}$
	$\leq \pm 0.2\% \text{ FS / 10K (max.)}$
Response time	Liquids with viscosity < 100 cSt < 4 ms
Overload pressure (static)	6 × FS (max. 1500 bar)
Burst pressure	6 × FS (max. 2000 bar)
Durability, P: 10 – 90% FS	> 10 × 10 ⁶ cycles

Electrical specifications

Nom. output signal (short-circuit protected)	4 – 20 mA	0 – 5 V, 1 – 5 V, 1 – 6 V	0 – 10 V,
Supply voltage [U _B], polarity protected	10 – 30 V	9 – 30 V	15 – 30 V
Supply – current consumption	–	≤ 5 mA	≤ 8 mA
Supply voltage dependency	$\leq \pm 0.05\% \text{ FS / 10 V}$		
Current limitation	28 mA (typ.)	–	
Output impedance	–	$\geq 25 \text{ k}\Omega$	
Load [R _L] (load connected to 0 V)	$R_L \leq (U_B - 10 \text{ V}) / 0.02 \text{ A}$	$R_L \geq 10 \text{ k}\Omega$	$R_L \geq 15 \text{ k}\Omega$

Environmental conditions

Sensor temperature range	Normal	-40 – 85 °C	
	ATEX Zone 2	-10 – 85 °C	
Media temperature range	115 - (0.35 × Ambient temp.)		
Ambient temperature range (depending on electrical connection)	See page 5		
Compensated temperature range	0 – 80 °C		
Transport / storage temperature range	-50 – 85 °C		
EMC – Emission	EN 61000-6-3		
EMC – Immunity	EN 61000-6-2		
Insulation resistance	> 100 MΩ at 100 V		
Mains frequency test	Based on SEN 361503		
Vibration stability	Sinusoidal	15.9 mm-pp, 5 Hz – 25 Hz	IEC 60068-2-6
		20 g, 25 Hz – 2 kHz	
Shock resistance	Random	7.5 g _{rms} , 5 Hz – 1 kHz	IEC 60068-2-64
	Shock	500 g / 1 ms	IEC 60068-2-27
Shock resistance	Free fall	1 m	IEC 60068-2-32
	Enclosure (depending on electrical connection)	See page 5	

Technical data
(continued)
Explosive atmospheres

Zone 2 applications	II 3G Ex na IIA T3 Gc -20C<Ta<+85C	EN60079-0; EN60079-15
---------------------	---	-----------------------

When used in ATEX Zone 2 areas at temperatures <-10 °C the cable and plug must be protected against impact.

Mechanical characteristics

Materials	Wetted parts	EN 10088-1; 1.4404 (AISI 316 L)
	Enclosure	EN 10088-1; 1.4404 (AISI 316 L)
	Electrical connections	See page 5
Net weight (depending on pressure connection and electrical connection)		0.2 – 0.3 kg

Ordering standard

MBS 32
MBS 33

Gasket / O-ring material

0	No gasket
2	Gasket, NBR -40 °C – 85 °C
4	O-ring, NBR -40 °C – 85 °C

Pressure connection

A B 0 4	G ¼ A (EN 837)
A B 0 8	G ½ A (EN 837)
A C 0 4	¼ – 18 NPT
B A 1 2	DIN 3852/3; M18 × 1.5 – 6 g NBR O-ring
B A 1 6	DIN 3852-E-M22 × 1.5 NBR gasket
G B 0 4	DIN 3852-E-G ¼ gasket DIN 3869-14

Electrical connection

A1	Plug Pg 9 (EN175301-803-A)
A3	Screened cable, 2 m

Output signal

1	4 – 20 mA ¹⁾
2	0 – 5 V ²⁾
3	1 – 5 V ²⁾
4	1 – 6 V ²⁾
5	0 – 10 V ²⁾

Measuring range

0 – 1.0 bar	1 0
0 – 1.6 bar	1 2
0 – 2.5 bar	1 4
0 – 4.0 bar	1 6
0 – 6.0 bar	1 8
0 – 10 bar	2 0
0 – 16 bar	2 2
0 – 25 bar	2 4
0 – 40 bar	2 6
0 – 60 bar	2 8
0 – 100 bar	3 0
0 – 160 bar	3 2
0 – 250 bar	3 4
0 – 400 bar	3 6
0 – 600 bar	3 8

Pressure reference

Gauge (relative)	1
Absolute	2


¹⁾ MBS 33 only ²⁾ MBS 32 only

Preferred version

Non-standard build-up combinations may be selected. However, minimum order quantities may apply. Please contact your local Danfoss office for further information or request on other versions.

Dimensions / Combinations

Type code	A1	A3
	EN175301-803-A, Pg 9	2 m screened cable

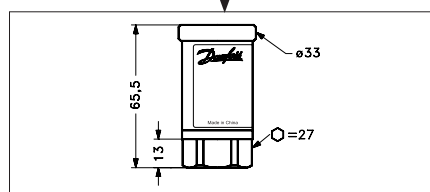

	G ¼ A (EN 837)	DIN 3852/3 M18 x 1.5 – 6 g NBR, O-ring	G ½ A (EN 837)	¼ – 18 NPT	DIN 3852-E- M22 x 1.5 – 6 g Gasket: DIN 3869-14 NBR, O-ring	DIN 3852-E-G ¼ Gasket: DIN 3869-14 NBR, Gasket
Type code	AB04	AB12	AB08	AC04	BA16	GB04
Recommended torque ¹⁾	30 – 35 Nm	30 – 35 Nm	30 – 35 Nm	2 – 3 turns after finger tightened	30 – 35 Nm	30 – 35 Nm

¹⁾ Depends of different parameters as packing material, mating material, thread lubrication and pressure level.

Electrical connections

Type code	A1	A3
	<p>EN 175301-803-A, Pg 9</p>	<p>2 m screened cable</p>
Ambient temperature	-40 – 85 °C	-40 – 85 °C
Enclosure (IP protection fulfilled together with mating connector)	IP65	IP67
Material	Glass filled polyamide, PA 6.6	Polyolefin cable with PE shrinkage tubing
Electrical connection, 4 – 20 mA output (2 wire)	<p>Pin 1: + supply Pin 2: ÷ supply Pin 3: not used</p> <p>Earth: Connected to MBS enclosure</p>	<p>Brown wire: + supply Black wire: ÷ supply Red wire: not used Orange: not used Screen: not connected to MBS enclosure</p>
Electrical connection, 0 – 5 V, 1 – 5 V, 1 – 6 V, 0 – 10 V output	<p>Pin 1: + supply Pin 2: ÷ supply¹⁾ Pin 3: + output</p> <p>Earth: Connected to MBS enclosure</p>	<p>Brown wire: + output Black wire: ÷ supply¹⁾ Red wire: + supply Orange: not used Screen: not connected to MBS enclosure</p>

¹⁾ Common